



# NEMA 54 三相130mm系列

□ 130 mm

1.2°

三线三相

## 规格




型号	步进角	额定电压	额定电流	电阻	每相电感	保持力矩	转动惯量	引线数	重量	电机长度
	deg.	V	A/φ	Ω/φ	mH/φ	mN·m	g·cm <sup>2</sup>	Lead	Kg	mm
SS5402C40A	1.2	4.4	4.0	1.1	4.9	20000	26700	3	14.1	183
SS5403C40A	1.2	11.2	4.0	2.8	17.9	28000	33970	3	17.2	215
SS5404C40A	1.2	13.2	4.0	3.3	21.5	35000	41240	3	19.8	247
SS5405C40A	1.2	16.8	4.0	4.2	28.9	50000	55780	3	26	311

A:单出轴 B:双出轴


配驱动器型号：MA-3208

## 尺寸图纸(单位: mm)




SS5402C40A




### 力矩曲线

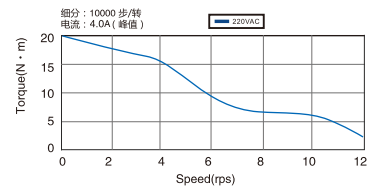




SS5403C40A




### 力矩曲线

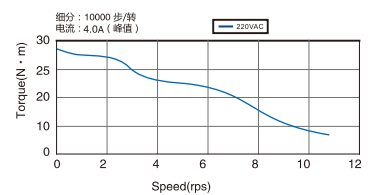

SS5404C40A



### 力矩曲线

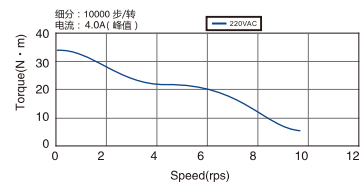

两相 / 三相步进电机

减速步进电机



行星减速步进电机

刹车步进电机


总线驱动器  
闭环步进电机

步进电机驱动器


SS5405C40A

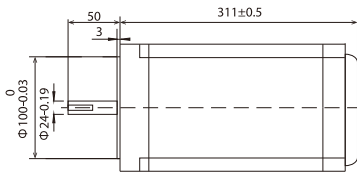

力矩曲线

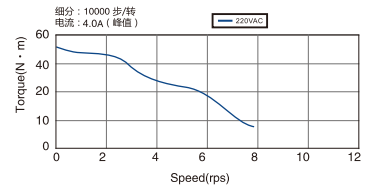

接线图



1	2	3	4
U	V	W	GND

两相 / 三相步进电机

减速步进电机

行星减速步进电机

刹车步进电机

总线驱动器  
闭环步进电机

步进电机驱动器



此系列型号尺寸为我司标准品, 我们都可以根据客户的要求提供最佳的设计方案, 请把您的要求联络到我们的销售处或者客服热线。



电机在运转时, 电机表面的温度不要超过100摄氏度。